RUGGED PCB TYPE - MULTIPLE OUTPUT

LEB Series

Feature
- Rugged PCB type (CEM3)
- Harmonic attenuator (Complies with IEC61000-3-2)
- Universal input voltage (AC85 – 264V)
- Remote ON / OFF (Option)

Safety agency approvals
- UL60950-1, C-UL recognized, TÜV approved
- Complies with DEN-AN

EMI
- Complies with FCC-B, CISPR22-B, EN55022-B, VCCI-B

2-year warranty



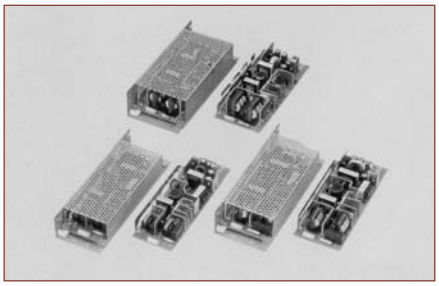

LEB100F, LEB150F, LEB225F
(Universal Input)

Model		Input Voltage (V)	Output Voltage / Output Current V1(V)/(A)	V2(V)/(A)	Case Size W • H • D (mm)	Weight (g)	Safety Agency Approvals
LEB100F	-0512	AC 85 - 264 1ø or DC 120 - 370	5(V) 5(A)	12(V) 5.0(A) (10.0A)	75 · 35 · 222	420	
	-0324		3.3(V) 5(A)	24(V) 4.0(A) (7.0A)			
	-0524		5(V) 5(A)	24(V) 4.0(A) (7.0A)			
	-0530		5(V) 5(A)	30(V) 3.2(A) (5.6A)			
	-0536		5(V) 5(A)	36(V) 2.7(A) (4.7A)			
LEB150F	-0512		5(V) 5(A)	12(V) 7.5(A) (14.0A)	85 · 40 · 222	530	
	-0324		3.3(V) 5(A)	24(V) 6.0(A) (10.0A)			
	-0524		5(V) 5(A)	24(V) 6.0(A) (10.0A)			
	-0530		5(V) 5(A)	30(V) 4.8(A) (8.0A)			
	-0536		5(V) 5(A)	36(V) 4.0(A) (6.7A)			
LEB225F	-0512		5(V) 5(A)	12(V) 10.0(A) (20.0A)	95 · 45 · 222	700	
	-0324		3.3(V) 5(A)	24(V) 9.0(A) (14.0A)			
	-0524		5(V) 5(A)	24(V) 9.0(A) (14.0A)			
	-0530		5(V) 5(A)	30(V) 7.2(A) (11.0A)			
	-0536		5(V) 5(A)	36(V) 6.0(A) (9.3A)			

AC – DC CONVERTERS

Y Series

YS5, YS10, YS15, YW5, YW10, YW15

Model (W)	Input (V)	Output (V)	Output (A)	Size • Weight W • H • D mm (g)	Safety Standard	Remark
YS5 (5W)	AC85 ~ 132 DC110 ~ 170	5	1.0	50 · 18.5 · 43 (65)		
		12	0.45			
YS10 (10W)		5	2.0	58·18·5·45 (75)		
		12	0.90			
YS15 (15W)		5	3.0	65 · 20.5 · 45 (100)		
		12	1.30			
YW5 (5W)	AC85 ~ 132 DC110 ~ 170	±12	0.22	50 · 18.5 · 43 (65)		
		±15	0.17			
YW10 (10W)		±12	0.45	58 · 18.5 · 45 (75)		
		±15	0.35			
YW15 (15W)		±12	0.65	65 · 20.5 · 45 (100)		
		±15	0.50			

Feature
- Single Output
- Dual Output
- S.M.T. (Surface Mount Technology)
- Utilized to realize smaller and lighter weight
- Inrush current and overcurrent protection
- Safety standard : UL, CSA

2-year warranty