



## MULTIPLE OUTPUT - UNIT TYPE

### RMB Series

#### Feature

- Inrush current, overcurrent and overvoltage protection (15W : Zener diode clamping)
- Safety standard : UL, CSA
- V1 and V2 isolated
- No minimum load current required
- Peak current for V2 (12,24V)
- Low noise level : FCC-B, VCCI-2

**3-year warranty**

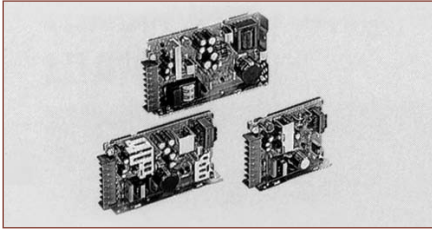

RMB15, RMB30, RMB50

Model (W)	Input (V)	Output (V) / (A)		Size · Weight W · H · D (g)	Safety Standard	Remarks
		V1 (V)/(A)	V2 (V)/(A)			
RMB15 (15W)	-1	5 0.8	12 1.0 (1.3)	28 · 80 · 100 (250)	UL SP	
	-2	5 0.8	24 0.5 (0.65)			
RMB30 (30W)	-1	5 1.5	12 2.0 (2.8)	31 · 80 · 135 (350)	UL SP	
	-2	5 1.5	24 1.0 (1.4)			
RMB50 (50W)	-1	5 1.5	12 3.6 (4.0)	31 · 93 · 155 (350)	UL SP	
	-2	5 1.5	24 1.8 (2.0)			


\*( ) : shows peak current.

### RMC Series

#### Feature

- Inrush current, overcurrent and overvoltage protection (15W : Zener diode clamping)
- Safety standard : UL, CSA
- V1 and V2 / V3 isolated
- No minimum load current required for 5V
- Low noise level : FCC-B, VCCI-2

**3-year warranty**

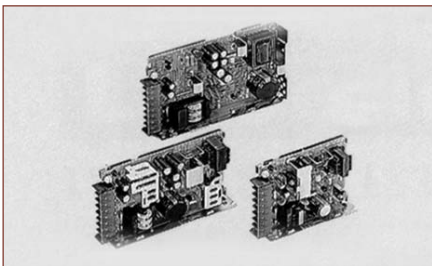

RMC15, RMC30, RMC50

Model (W)	Input (V)	Output (V) / (A)			Size · Weight W · H · D (g)	Safety Standard	Remarks
		V1 (V)/(A)	V2 (V)/(A)	V3 (V)/(A)			
RMC15 (15W)	-1	5 2.0	12 0.3	-12 0.2	28 · 80 · 100 (250)	UL SP	
	-2	5 2.0	15 0.2	-15 0.2			
RMC30 (30W)	-1	5 3.0	12 1.2	-12 0.3	31 · 80 · 135 (350)	UL SP	
	-2	5 3.0	15 0.5	-15 0.5			
RMC50 (50W)	-1	5 5.0	12 1.5 (2.0)	-12 0.5	31 · 93 · 155 (350)	UL SP	
	-2	5 5.0	15 1.2	-15 0.5			

\*( ) : shows peak current.