


## CQS Series

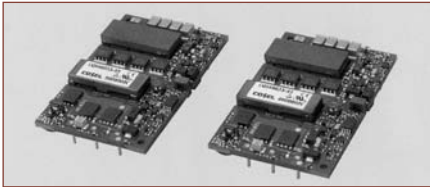

CQS  
(Mared Models: Consult with us for delivery.)

Model	Input Voltage (V)	Output Voltage (V)	Output Current (A)	Case Size W · H · D (mm)	Weight (g)	Safety Agency Approvals
CQS	DC 36 - 76	1.8	50	57.9 · 8.5 · 36.8	40	
		2.5	45			
		3.3	45			
		5	28			
		12	14			

### Feature

- Compact DC-CC Converter, "BRICK SIZE" which has been standard size for Telecommunication Market
- High efficiency
- High density
- High reliability : not built-in aluminum and tantalum electrolytic capacitor
- Built-in overcurrent, overvoltage and thermal protection circuits
- Built-in remote ON / OFF,

### CE marking

- Low Voltage Directive

### Safety agency approvals

- UL60950-1, C-UL recognized, TÜV approved

### 5-year warranty

## CBS Series

### Feature

- Compact DC-CC Converter, "HALF BRICK" which has been standard size for Telecommunication Market
- High efficiency
- High density
- High reliability : not built-in aluminum and tantalum electrolytic capacitor
- Built-in overcurrent, overvoltage and thermal protection circuits
- Built-in remote ON / OFF
- Mounting hole (M3 tapped)


### CE marking

- Low Voltage Directive

### Safety agency approvals

- UL60950-1, C-UL recognized, TÜV approved

### 5-year warranty

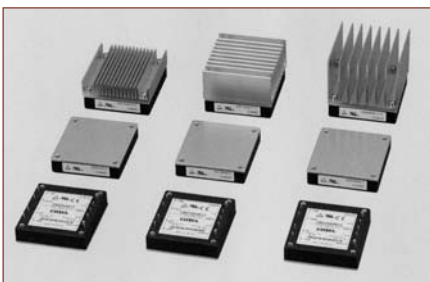

CBS50, CBS100, CBS200, CBS350

Model	Input Voltage (V)	Output Voltage (V)	Output Current (A)	Case Size W · H · D (mm)	Weight (g)	Safety Agency Approvals
CBS50	DC 18 - 36	1.8	11.7	57.9 · 12.7 · 61	83	
		2.5	11.7			
		3.3	11.7			
		5	10.0			
		12	4.2			
		15	3.4			
		24	2.1			
	DC 36 - 76	28	1.8			
		1.8	11.7			
		2.5	11.7			
		3.3	11.7			
		5	10.0			
		12	4.2			
		15	3.4			
CBS100	DC 18 - 36	24	2.1	57.9 · 12.7 · 61	83	
		28	1.8			
		1.8	23.4			
		2.5	23.4			
		3.3	23.4			
		5	20.0			
		12	8.4			
	DC 36 - 76	15	6.7			
		24	4.2			
		28	3.6			
		1.8	23.4			
		2.5	23.4			
		3.3	23.4			
		5	20.0			
CBS200	DC 18 - 36	12	8.4	57.9 · 12.7 · 61	83	
		15	6.7			
		24	4.2			
		28	3.6			
		1.8	35.0			
		2.5	35.0			
		3.3	35.0			
	DC 36 - 76	5	30.0			
		12	16.7			
		15	13.4			
		24	8.4			
		28	7.2			
		1.8	35.0			
		2.5	35.0			
CBS350	DC 20 - 36	3.3	35.0	57.9 · 12.7 · 61	83	
		5	30.0			
		12	16.7			
		15	13.4			
	DC 36 - 76	24	8.4			
		28	7.2			
		48	4.2			
		12	25.0			
		24	14.5			
		28	12.5			
DC 36 - 76	32	11.0				
	12	29.0				
	24	14.5				
	28	12.5				
DC 36 - 76	32	11.0				