
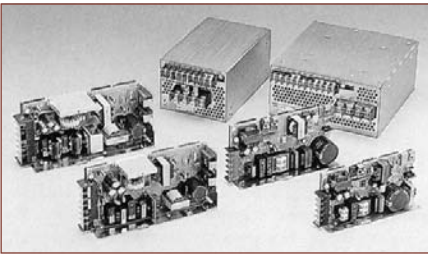


# SINGLE OUTPUT - UNIT TYPE

## PAA Series

### Feature

- Harmonic Correction Per IEC 1000-3-2
- Universal input (AC82 ~ 264V)
- 3-year warranty**



PAA50F, PAA75F, PAA100F, PAA150F, PAA300F, PAA600F

Model (W)	Input (V)	Output (V)	Output (A)	Size · Weight W · H · D (g)	Safety Standard	Remark
PAA50F (50W)	AC85 ~ 264	3	10.0	37 · 85 · 159 (400)		
		5	10.0			
		12	4.3			
		15	3.5			
		24	2.2			
		48	1.1			
PAA75F (75W)		3	15.0	42 · 93 · 175 (500)		
		5	15.0			
		12	6.3			
		15	5.0			
		24	3.2			
		48	1.6			
PAA100F (100W)		3	20.0	50 · 93 · 189 (700)		
		5	20.0			
		12	8.5			
		15	7.0			
		24	4.5			
		48	2.1			
PAA150F (150W)		3	30.0	65 · 93 · 199 (900)		
		5	30.0			
		12	13.0			
		15	10.0			
		24	6.5			
		48	3.3			
PAA300F (300W)	3	60.0	120 · 92 · 190 (2.2K)			
	5	60.0				
	12	27.0				
	15	22.0				
	24	14.0				
	48	7.0				
PAA600F (600W)	3	120.0	190 · 92 · 200 (4.0K)			
	5	120.0				
	12	53.0				
	15	43.0				
	24	27.0				
	48	13.0				

## AD Series

### Feature

- Suitable for FA machines
- Low price
- Wide input voltage range (AC85 ~ 132V / 170 ~ 264V selectable : AD240, 480)
- Inrush current and overcurrent protection
- 2-year warranty**



AD240, AD480, AD960

Model (W)	Input (V)	Output (V)	Output (A)	Size · Weight W · H · D (g)	Safety Standard	Remark		
AD240 (240W)	AC85 ~ 132 or AC170 ~ 264	24	10	75 · 99 · 200 (1,800)	-			
		30	8					
AD480 (480W)		24	20 (Peak 24)	110 · 140 · 200 (2,600)			-	
		30	10 (Peak 32)					
AD960 (960W)		24	20 (Peak 40)	89 · 141.6 · 230 (3,000)				
		30	16 (Peak 32)					