
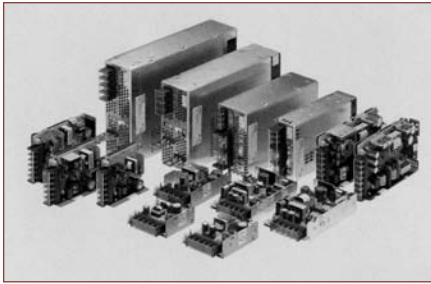


MULTIPLE OUTPUT - UNIT TYPE

PBW Series



PBW15F, PBW30F, PBW50F
(Universal Input)

Feature

- Super small-size & light weight
- Harmonic attenuator (Complies with IEC61000-3-2)
- Universal input (AC85 – 264V)
- Variety of option (PBW15F – 50F)

Safety agency approvals

- UL60950-1, C-UL(CSA60950-1), EN50178
- Complies with DEN-AN

EMI

- Complies with FCC-B, CISPR22-B, EN55011-B, EN55022-B, VCCI-B

5-year warranty

- (refer to Instruction Manual)

CE marking

- LVD and EMC directive

EMC Compliance :

- EN61204-3,
- EN61000-6-2
- EN61000-4-2
- EN61000-4-3
- EN61000-4-4
- EN61000-4-5
- EN61000-4-6
- EN61000-4-8
- EN61000-4-11

Model	Input Voltage (V)	Maximum Output Power (W)	Output Voltage (V)	Output Current (A)		Case Size W · H · D (mm)	Weight (g)	Safety Agency Approvals
				Current 1	Current 2			
PBW15F	AC 85-264 1ø or DC110-370	16.8	±12 (+24)	0.7	1.4	31 · 78 · 85	200	
		15.0	±15 (+30)	0.5	1.0			
PBW30F	AC 85-264 1ø or DC110-370	15.0	±5 (+10)	1.5	2.0	31 · 78 · 103	270	
		31.2	±12 (+24)	1.3	1.7			
		30.0	±15 (+30)	1.0	1.4			
PBW50F	AC 85-264 1ø or DC120-370	30.0	±5 (+10)	3.0	4.0	31 · 82 · 120	280	
		50.4	±12 (+24)	2.1	2.7			
		51.0	±15 (+30)	1.7	2.4			

* The sum of +power and -power must be less than output power. For details, please refer to our H.P (www.cosel.co.jp/en/).

