


MULTIPLE OUTPUT - UNIT TYPE

MMB Series

Feature

- Inrush current, overcurrent and overvoltage protection
- Safety standard : UL, CSA
- V1 and V2 isolated
- 2-year warranty**

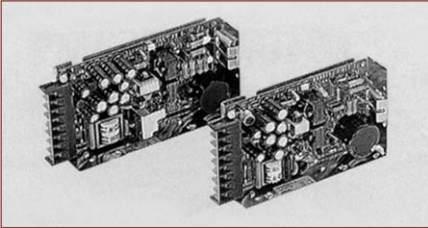

MMB50, MMB75


Model (W)	Input (V)	Output (V) / (A)		Size • Weight W • H • D (g)	Safety Standard	Remarks	
		V1 (V)/(A)	V2 (V)/(A)				
MMB50 (50W)	-1 -2 -3 -4 -5 -6	AC85 ~ 132 DC110 ~ 170	5	12	36 · 93 · 155 (400)	UL SF	
			3.0	3.0(3.6)			
			5	12			
			5.0	2.1			
			5	24			
			12	12			
MMB75 (75W)	-1 -2	AC85 ~ 132 DC110 ~ 170	2.1	2.1	42 · 93 · 175 (500)	UL SF	
			12	12			
			3.0	1.5			
			15	15			
			1.7	1.7			
			5	12			
			5.0	4.0			
			5	24			
			6.0	2.0			

*() : shows peak current.

MMC Series

Feature

- Inrush current, overcurrent and overvoltage protection
- Safety standard : UL, CSA
- V1 and V2 / V3 isolated
- 3-year warranty**

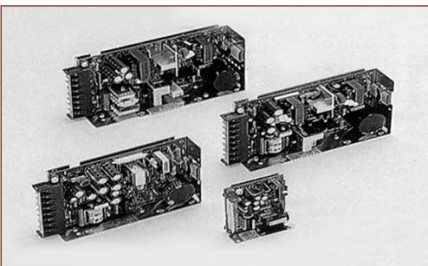

MMC8, MMC50, MMC75, MMC100

Model (W)	Input (V)	Output (V) / (A)			Size • Weight W • H • D (g)	Safety Standard	Remarks	
		V1 (V)/(A)	V2 (V)/(A)	V3 (V)/(A)				
MMC8 (8W)	-1 -2 -3	AC85 ~ 132 DC110 ~ 170	5	12	-12	27·74·68 (150)	UL SF	
			1.2	0.1	0.1			
			5	15	-15			
MMC50 (50W)	-1 -2 -3 -4	AC85 ~ 132 DC110 ~ 170	1.1	0.1	0.1	36·93·155 (400)	UL SF	
			5	12	-5			
			1.2	0.1	0.1			
			5	12	-12			
			5.0	1.5	0.5			
			5	12	-15			
MMC75 (75W)	-1 -2 -3 -4	AC85 ~ 132 DC110 ~ 170	5.0	1.5	0.5	42·93·175 (600)	UL SF	
			5	15	-15			
			5	12	-5			
			5.0	1.2	0.5			
			5	12	-12			
			5	12	-12			
MMC100 (100W)	-1 -2 -3 -4	AC85 ~ 132 DC110 ~ 170	5.0	1.5	0.5	50·93·190 (700)	UL SF	
			5	12	-12			
			8.0	1.8	0.5			
			5	12	-5			
			8.0	2.5	0.5			
			5	12	-12			
MMC100 (100W)	-1 -2 -3 -4	AC85 ~ 132 DC110 ~ 170	6.0	3.2	0.5	50·93·190 (700)	UL SF	
			5	12	-12			
			13.0	2.0	1.0			
			5	15	-15			
			13.0	1.5	1.0			
			5	12	-5			
MMC100 (100W)	-1 -2 -3 -4	AC85 ~ 132 DC110 ~ 170	13.0	2.0	1.0	50·93·190 (700)	UL SF	
			5	12	-12			
			8.0	4.0	1.0			
			5	12	-12			

*() : shows peak current.