


MULTIPLE OUTPUT - UNIT TYPE

PMC Series

Feature

- Worldwide input voltage range
AC85~264V free voltage (15, 30W)
AC85~132V / 170~264V selectable (50, 75, 100W)
 - Inrush current, overcurrent and overvoltage protection
 - Safety standard : UL, CSA, TUV
 - V1 and V2 / V3 isolated
 - Low noise level : FCC-B
- 3-year warranty**

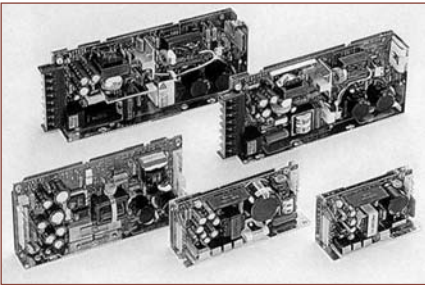

PMC15, PMC30, PMC50, PMC75, PMC100

Model (W)	Input (V)	Output (V) / (A)			Size • Weight W • H • D (g)	Safety Standard	Remarks
		V1 (V)/(A)	V2 (V)/(A)	V3 (V)/(A)			
PMC15 (15W)	AC85 ~ 264 DC110 ~ 370	-1	5 2.0	12 0.3	-12 0.2	37-60-110 (250)	
		-2	5 2.0	15 0.3	-15 0.2		
		-3	5 2.0	12 0.3	-5 0.2		
PMC30 (30W)		-1	5 3.0	12 1.2	-12 0.3	38.5-60-145 (300)	
		-2	5 3.0	15 0.7	-15 0.5		
PMC50 (50W)		-1	5 5.0	12 1.5 (2.0)	-12 0.5	30-93-185 (400)	
		-2	5 5.0	15 1.2	-15 0.5		
		-4	5 7.0	12 1.0 (1.5)	-12 0.3		
PMC75 (75W)	AC85 ~ 132 AC170 ~ 264 DC220 ~ 370	-1	5 8.0	12 2.5	-12 0.5	38-93-205 (600)	
		-2	5 8.0	15 1.8	-15 0.5		
		-4	5 6.0	12 3.2	-12 0.5		
PMC100 (100W)		-1	5 13.0	12 2.0	-12 1.0	48-93-220 (750)	
		-2	5 13.0	15 1.5	-15 1.0		
		-4	5 8.0	12 4.0	-12 1.0		

* () : shows peak current.