

# INDICATOR MBAR / BAR

## TYPE 800




Indicator for physical parameters with or without 2 setpoint values for 61 pressure ranges.

Front access to all adjustment. Limit value switching points pre-adjustable without applying pressure.

Accuracy	± 1 digit / 23°C
Reproducibility	± 1 digit
Power supply	220V, 24VAC
Input signal	0-5/0-10 VDC 0-20/4-20mA
Signal current output	0-10VDC 0-20/4-20mA

Liquid crystal display, 3 1/2 digit, mbar, bar or other engineering units.

## TYPE 801

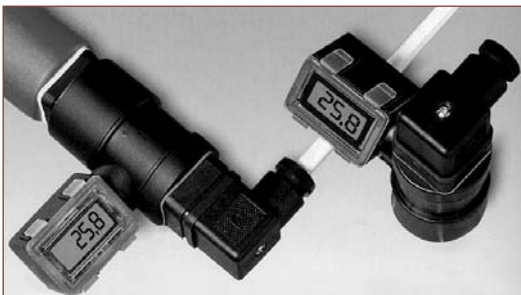

The series 801 display modules can be fitted on all DIN 43650 connectors. Irrespective of the installation arrangement of your transducer the display module can be rotated and turned to give the ideal reading-position.

Indication capabilities:

Lowest value	Highest value
-1.00	To 900

Calibration:

Factory calibration or calibration by the customer.

Signal	Power supply
0-5V	11-33VDC, 24VAC, three-wire
0-10V	18-33VDC, 24VAC, three-wire
0-20mA	18-33VDC, 24VAC, three-wire
4-20mA	8-33VDC, two-wire

